



Recorder

Flow

Pressure

Temp

Analyzer

Level

Datasheet

Dissolved oxygen sensor

AI-DO718

Datasheet

Dissolved oxygen sensor AI-DO718

The fluorescent dissolved oxygen sensor adopts a new generation of fluorescence lifetime technology and self-developed high-performance fluorescent materials. No oxygen consumption, no flow rate limitation, no electrolyte required, no maintenance and calibration, no hydrogen sulfide interference, and excellent stability. Built-in temperature sensor, automatic temperature compensation. RS485 output, can be networked without a controller.

Applications

- Aquaculture
- Sewage Treatment
- Surface water
- Regulating pools
- Biochemical ponds
- Industrial production processes

Features

- RS485 communication and MODBUS output
- No membrane and no electrolyte required
- No interference
- No need for frequent calibration
- No need to consume oxygen
- No flow rate limitation
- Built-in temperature sensor
- Automatic temperature compensation



Dissolved oxygen sensor

Parameters

Parameters	Details
Range	0-20mg/L or 0-200% saturation
Response time	10s
Ingress protection	IP68
Maximum water depth	10m
Accuracy	± 1%
Sensor drift	<1% per year
Temperature range	0~50°C
Temperature accuracy	±0.2°C
Sensor interface	Support RS-485, MODBUS protocol
Installation	3/4 inch parallel screw thread, immersion type
Power information	DC 5~24 V +/-5%, current <50mA
Temperature Sensor	NTC
Shell diameter	26mm
Shell length	151mm
Probe cable length	5m、10m、15m、30m
Calibration	One or two point calibration
Fluorescent cap life	One year (under normal use)
Sensor Housing Material	Titanium alloy

Note: The above technical parameters are the data in the laboratory standard environment


Wiring

(1) Power supply

Power supply must be DC 5-24V +/-5%, current<50mA

(2) Transducer electric connector



4 wire AWG-24 or AWG-26 shielding wire. OD=5mm

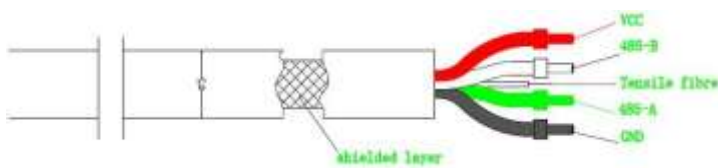

- 1, Red wire—Power (VCC)
- 2, White wire—485 data_B (485_B)
- 3, Green wire---485 data_A (485_A)
- 4, Black wire --- Ground wire (GND)
- 5, Bare wire Shielding layer

Dimensions

3/4 inch parallel screw thread

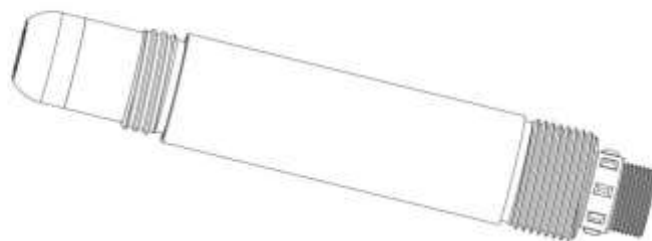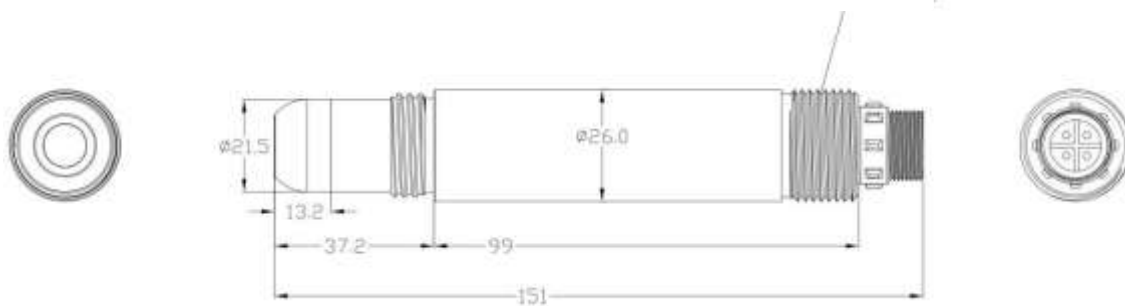

Unit:mm

Ordering Code

AI-DO718-A-B-10-GE										Description	
AI-DO718	-	-	-	-	-	-	-	-	-	-	Measurement Range: (0-20) mg/L or 0-200% Saturation Temperature Range: (0-50) °C Pressure Resistance: 0.3MPa
Serial Number	DO718										
Output	A										RS485
Power Supply	B										12VDC
Cable Length	10										10m
	20										20m
	30										30m
	XX										Other
Housing Material and Thread Type	GE										Titanium, G3/4



Arka Instruments LLP

Add: Hyderabad Office: H.no: 08-041/1,
Plot no 132, N C L Enclave, Kompally,
Hyderabad, Telangana, India - 500067
Land Line: +91 40359 00418
Mobile: +91 81438 12346
Email: admin@arkainstruments.com
Website: www.arkainstruments.com